

## SP79P

Ballast Type: Electromagnetic  
 Input Voltage: 120VAC+5%,-10%  
 Input Frequency: 60 Hz.

Starting Method: Preheat  
 Lamp Connection: Series  
 Unit Color: White

Unit Weight: 0.40 lb.  
 Carton Quantity: 72  
 Skid Quantity: 5760

**ELECTRICAL SPECIFICATION:**

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps	Line Current (A)	Input Power (W)	Power Factor	Max Current THD (%)	Current Crest Factor	Ballast Factor	Wiring Diagram	B.E.F.
120	CFT5W/G23	5	1	0.18	10	≥0.46	≤10	≤1.7	1.00	101	10.00
120	CFT7W/G23	7	1	0.17	10	≥0.47	≤10	≤1.7	0.95	101	9.50
120	CFT9W/G23	9	1	0.15	10	≥0.55	≤10	≤1.7	0.80	101	8.00
120	CFQ9W/G23	9	1	0.15	10	≥0.55	≤10	≤1.7	0.80	101	8.00
120	F6T5	6	1	0.18	10	≥0.49	≤10	≤1.7	1.10	001	11.00
120	F8T5	8	1	0.16	10	≥0.54	≤10	≤1.7	1.10	001	11.00

**PERFORMANCE:**

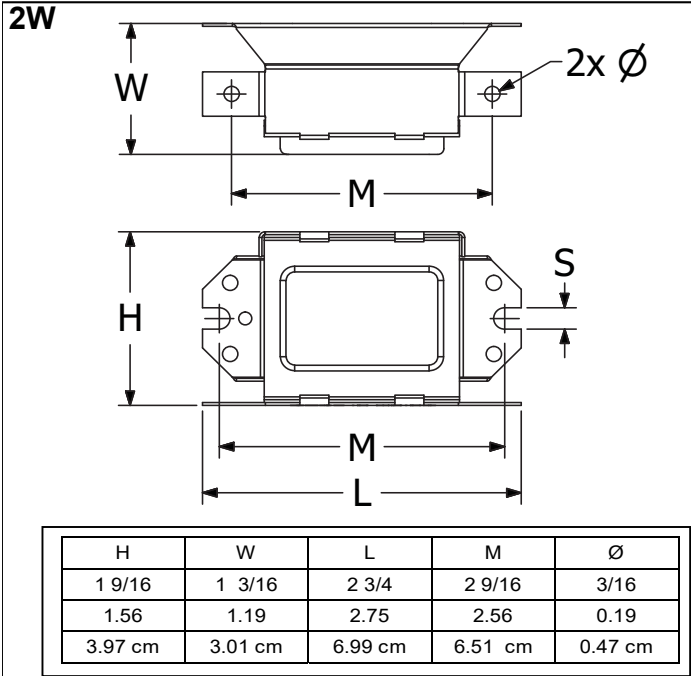
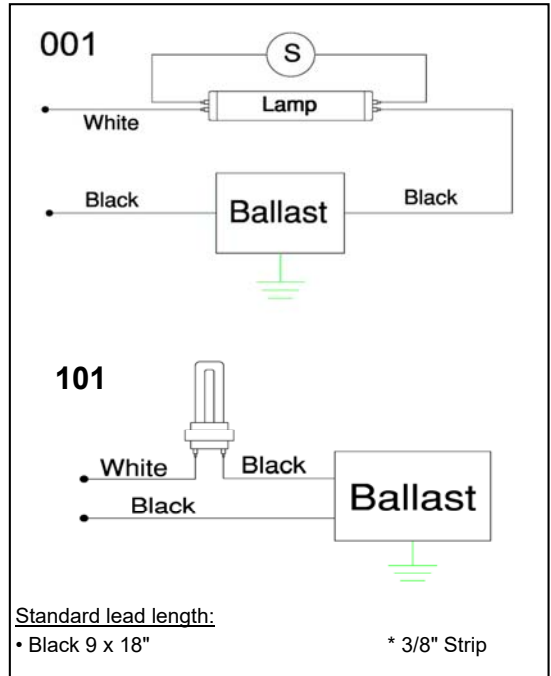
- Electromagnetic reactor type ballast
- Preheat start
- Series operation
- Normal power factor
- Clamped core and coil
- Sound rated A
- Meets ANSI C82.1

**APPLICATION:**

- Maximum case temperature: 194°F/90°C
- Maximum ambient temperature: 104°F/40°C
- Minimum starting temperature CFL: 32°F/0°C
- Minimum starting temperature Linear: 50°F/10°C
- Remote mounting: 10ft.
- Side Lead

**SAFETY:**

- UL/935 (Class P, Type 1 outdoor) listed
- CSA certified (cUL)
- Automatic reset thermal protector
- No PCB's
- RoHS Compliant

**STYLE:**

**WIRING DIAGRAM:**

**WARRANTY:**

Robertson Worldwide warrants to the purchaser that this ballast will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal conditions of use. For more information on Robertson Worldwide's ballasts, call 1-800-323-5633 or visit [www.robertsonww.com](http://www.robertsonww.com). For our energy star compliant ballasts, visit [www.nema.org/lampballastmatrix/](http://www.nema.org/lampballastmatrix/)

Revised 05/31/13