

RPZ123V120

Ballast Type: Electronic
Input Voltage: 120Vac ±10%
Input Frequency: 47-63Hz

Starting Method: Preheat Rapid Start
Lamp Connection: Series

Unit Color: Galvanneal
Unit Weight: 0.33 lbs.

ELECTRICAL SPECIFICATIONS:

Line Voltage (V)	No. of Lamps	Lamp Type	Typical Lamp Watts (W)	Lamp Voltage (V)	Lamp Current (mA)	Input Current (A)	Input Power (W)	Input Current THD (%)	Lamp Current Crest Factor	Electrical Efficiency
108	1	PLL18W/TUV	18	47	331	0.33	18.0	149	1.54	0.87
120				45	402	0.33	20.9	159	1.56	0.86
132				44	418	0.34	21.8	162	1.57	0.85
108	1	TUV 18W	18	47	331	0.33	18.0	149	1.54	0.87
120				45	402	0.33	20.9	159	1.56	0.86
132				44	418	0.34	21.8	162	1.57	0.85
108	1	TUV 25W - 4P SE	23	69	285	0.38	21.6	140	1.51	0.90
120				65	338	0.39	24.5	145	1.53	0.89
132				62	383	0.40	26.7	150	1.53	0.89

PERFORMANCE:

- Power Factor = >0.50
- Encased & Potted
- Sound Rated A
- Internal Surge Protection
- Meets FCC Part 18 (Class B) for EMI and RFI Consumer Limits
- Meets ANSI Standard C62.41 for Transient Protection
- Meets ANSI Standard C82.11 for Ballast Requirements


APPLICATION:

- Maximum Case Temperature: 167°F/75°C
- Maximum Ambient Temperature: 122°F/50°C
- Minimum Starting Temperature: 23°F/-5°C
- Remote Mounting: 18 ft. Max. Lead Length, 18AWG

SAFETY/STANDARDS:


- UL/935 Listed (Class P, Type 1 Outdoor)
- cUL (CSA/C22.2 Certified)
- No PCBs, Type HL, Type CC
- Inherent Thermal Protection
- RoHS Compliant

CASE STYLE: CS-3C

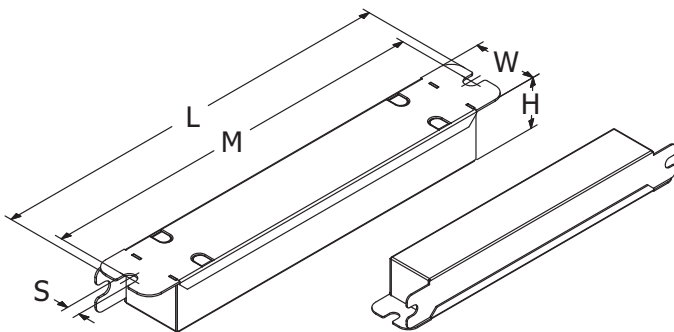


L	W	H	M	S
5-29/32	7/8	3/4	5-5/8	3/16
5.91	0.91	0.75	5.63	0.19
15.00 cm	2.30 cm	1.91 cm	14.29 cm	0.48 cm

WIRING DIAGRAM: (4-PIN LAMPS)

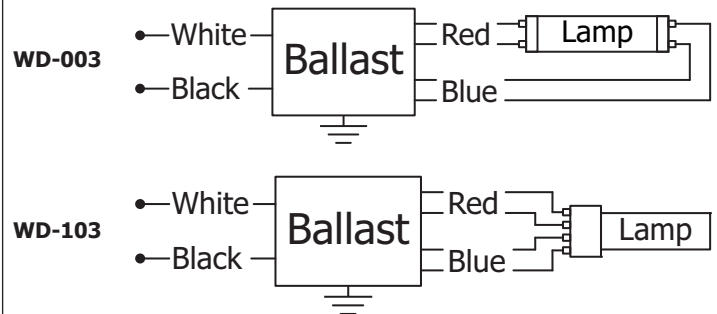

WIRING DIAGRAM: (2-PIN LAMPS)

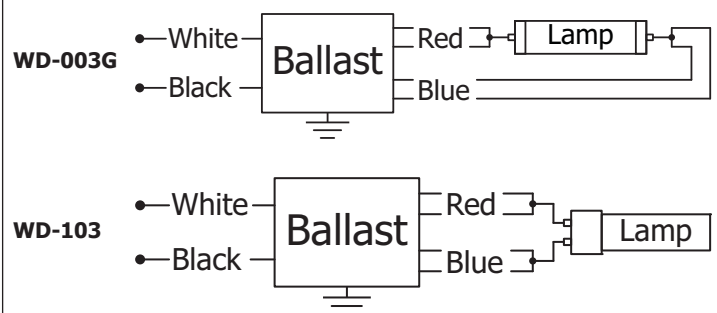

- Black: 12"
- White: 12"
- Tolerance: +1.00, -0.50"
- Strip: 0.375" ± 0.060"

- Red: (2) 12"
- Blue: (2) 12"
- Tolerance: +1.00, -0.50"
- Strip: 0.375" ± 0.060"

WARRANTY:

Robertson Worldwide warrants to the purchaser that this product will be free from defects in material or workmanship for a period of 3 years from date of manufacture when properly installed and under normal condition of use. Specifications subject to change without notice.

For more information on Robertson Worldwide products, visit www.RobertsonLighting.com