Robertson WORLDWIDE®
INNOVATIVE LIGHTING SOLUTIONS

HP2627P

Ballast Type:	Electromagnetic	Starting Method:	Preheat Start	Unit Color:	Black
Input Voltage:	277VAC +5%, -10%	Lamp Connection:	Series	Unit Weight:	1.95 lbs.
Input Frequency:	60Hz				

ELECTRICAL SPECIFICATIONS:

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps	Line Current (A)	Input Power (W)	Power Factor	Max Current THD (%)	Current Crest Factor	Ballast Factor	Wiring Diagram
277	CFS28W/GR8	28	1	0.12	30	≥ 0.96	≤ 25	≤ 1.7	0.91	102
277	CFQ26W/G24d, CFTR26W/GX24d	26	1	0.10	28	≥ 0.97	≤ 25	≤ 1.7	0.93	102

PERFORMANCE:
- Electromagnetic Reactor Type Ballast
- Preheat Start
- Series Operation
- Normal Power Factor
- Normal Ballast Factor
- Encased & Potted
- Sound Rated A
- Meets ANSI Standard C82.1 for Ballast Requirements

APPLICATION:
- Maximum Case Temperature: 194ºF/90ºC
- Maximum Ambient Temperature: 104ºF/40ºC
- Minimum Starting Temperature: 25ºF/-4ºC
- Remote Mounting: 10 ft. Max. Lead Length, 18AWG

SAFETY/STANDARDS:
- UL/935 Listed (Class P, Type 1 Outdoor)
- No PCB's, Type HL
- Auto Reset Thermal Protection
- RoHS Compliant

CASE STYLE: CS-8

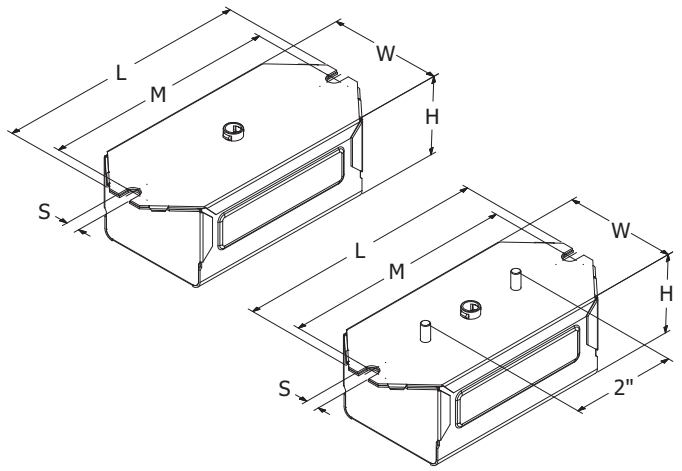

L	W	H	M	S
4 3/4	2 3/16	1 5/8	4 3/8	3/16
4.75	2.17	1.58	4.37	0.21
12.07 cm	5.51 cm	4.02 cm	11.11 cm	0.55 cm

WIRING DIAGRAM: WD-102

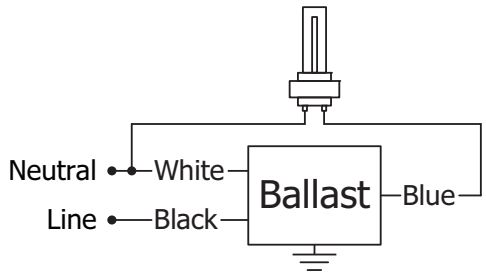

Version 3
- Black: 9"
- White: 9"
- Blue: 9"
  Tolerance: +1.00, -0.50"
- Strip: 0.375" ± 0.060"

Version 4
- Black: 12"
- White: 12"
- Blue: 12"
  Tolerance: +1.00, -0.50"
- Strip: 0.375" ± 0.060"

WARRANTY:
Robertson Worldwide warrants to the purchaser that this product will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal condition of use. Specifications subject to change without notice.

For more information on Robertson Worldwide products, visit www.RobertsonLighting.com

1748 Independence Blvd, Bldg. A, Sarasota, FL 34234