MAGNETIC
Normal Power Factor

L48

Ballast Type:	Electromagnetic	Starting Method:	Preheat	Unit Weight	0.50 lb
Input Voltage:	120VAC+5%,-10%	Lamp Connection:	Series	Carton Quantity:	66
Input Frequency:	60 Hz.	Unit Color	Black	Skid Quantity:	3168

ELECTRICAL SPECIFICATION:

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps	Line Current (A)	Input Power (W)	Power Factor	Max Current THD (%)	Current Crest Factor	Ballast Factor	Wiring Diagram	B.E.F.
120	F4T5	4	1	0.16	10	≥0.52	≤15	≤1.7	1.00	001	10.00
120	F6T5	6	1	0.15	11	≥0.60	≤15	≤1.7	1.00	001	9.09
120	F8T5	8	1	0.14	12	≥0.68	≤15	≤1.7	1.00	001	8.33

PERFORMANCE:
- Electromagnetic reactor type ballast
- Preheat start
- Series operation
- Normal power factor
- Encased and potted
- Sound rated C
- Meets ANSI C82.1

APPLICATION:
- Maximum case temperature: 194ºF/90ºC
- Maximum ambient temperature: 104ºF/40ºC
- Minimum starting temperature Linear: 50ºF/10ºC
- Remote mounting: 10ft.

SAFETY:
- UL/935 (Type HL, Type 1 outdoor) listed
- No PCB's
- RoHS Compliant

STYLE:

3A

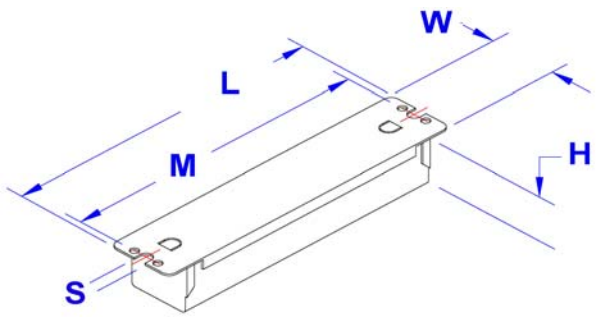

H	W	L	M	S
13/16	1 5/32	5 1/4	5	3/16
0.81	1.16	5.25	5.00	0.19
2.06cm	2.95cm	13.34cm	12.70cm	0.47cm

WIRING DIAGRAM:

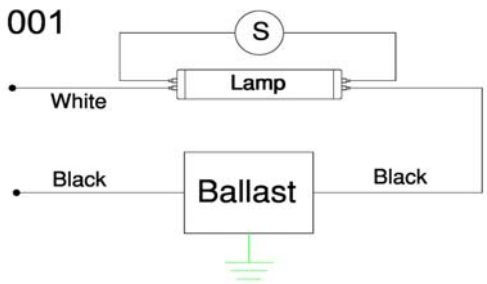

Standard lead lengths:
- Blk: (2) 6" * 3/8" Strip

WARRANTY

Robertson Worldwide warrants to the purchaser that this product will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal condition of use. Specifications subject to change without notice.

For more information on Robertson Worldwide products, visit www.RobertsonLighting.com

1748 Independence Blvd, Bldg. A, Sarasota, FL 34234